



BOYUT VE AĞIRLIKLAR (DIMENSIONS AND WEIGHTS)		ELEKTRİKSEL ÖZELLİKLER (ELECTRICAL PROPERTIES)			
Type Tip	Nominal Kesit Nominal cross-section	Dış Çap(yaklaşık) Overall Diameter (approx.)	Net Ağırlık(yaklaşık) Net Weight(apprx.)	İletken DC Direnci 20 °C'de max. DC Conductor Resistance at 20 °C	Akım taşıma kapasitesi Current Carrying Capacity
	mm <sup>2</sup>	mm	kg/km	ohm / km	Havada 30 °C'de In Air at 30 °C
H05VV-F	2x0,75	6,05	52,43	26,00	6
	2x1	6,39	61	19,50	10
	2x1,5	7,30	80,73	13,30	16
	2x2,5	8,86	121,58	7,98	25
	2x4	10,33	170,69	4,95	32
	3x0,75	6,47	62,15	26,00	6
	3x1	6,91	73,81	19,5	10
	3x1,5	7,99	102,79	13,3	16
	3x2,5	9,70	150,34	7,98	25
	3x4	11,17	216,53	4,95	32
	4x0,75	7,04	74,04	26,0	6
	4x1	7,81	94,21	19,5	10
	4x1,5	8,87	126,38	13,3	16
	4x2,5	10,63	191,3	7,98	20
	4x4	12,15	263,44	4,95	32
	5x0,75	8,04	98,62	26,0	6
	5x1	8,37	111,53	19,5	10
	5x1,5	10,10	158,89	13,3	16
	5x2,5	11,8	229,46	7,98	20
	5x4	13,67	328,29	4,95	32

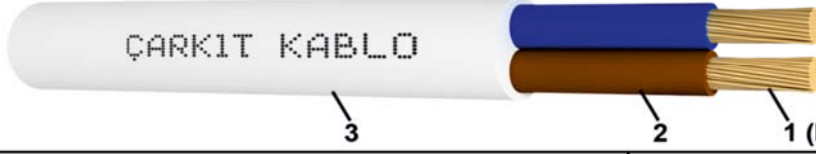

**Kod**  
H05VV-F CU/PVC/PVC  
CU: IEC 60228 SINIF 5  
F: Fleks iletken

**Standartlar**  
TS 9760 HD 21.5.S3-VDE 0281-5-IEC 60227-5

**Teknik Veriler**  
Maksimum çalışma sıcaklığı : 70 °C  
Maksimum kısa devre sıcaklığı : 160 °C (max. 5 sn.)  
Anma gerilimi : 300 / 500 V

**Kullanıldığı Yerler**  
Orta derecede mekanik zorlamaların bulunduğu kapalı, kuru, buharlı ve rutubetli yerlerde çalışan ev aletlerinde kullanılır.

**Yapısı**  
1. İnce çok telli bükülgen bakır iletken  
2. PVC izole  
3. PVC kılıf

**Code**  
H05VV-F CU/PVC/PVC  
CU: IEC 60228 CLASS 5  
F: Flexible conductor

**Standards**  
TS 9760 HD 21.5.S3-VDE 0281-5-IEC60227-5

**Technical Data**  
Max. operating temperature : 70 °C  
Short circuit temperature : 160 °C (max. 5 sn.)  
Rated voltage : 300/500 V

**Application**  
Used on household appliances in covered, dry, steamed and humid areas where low mechanical stress exists.

**Construction**  
1. Flexible wires with fine stranded copper conductors  
2. PVC insulation.  
3. PVC sheath